



J. Environ. Nanotechnol.
Volume 6, No.4(2017) pp. 01-06
ISSN (Print): 2279-0748
ISSN (Online): 2319-5541
doi:10.13074/jent.2017.12.174292

Water Management System by Global Service Mobile (GSM) using Nanostructured Magnesium Oxide as Display for Agriculture Purposes

Neeraj Marwaha, A. K. Srivastava*

Academy of Scientific & Innovative Research (AcSIR), CSIR- National Physical Laboratory, Delhi, India.

Received:21.08.2017 Accepted:27.10.2017

Abstract

Herein we investigate the nanostructured MgO as an important material used for developing water management system. In this prototype, the various technologies available in the market for short message services (SMS) based canal pipeline water management using MgO nanoparticles as display device are explored in agriculture purposes. We motivate our research and provide a conceptual introduction which illustrates the need to increase or decrease the level of water, by activating three different water gates represented by water pump. If there is need to increase the level of water, we can do, decrease the level then also we can do by two different SMS. Subsequently, we suggest general system architecture for this mobile based irrigation system for agriculture application for farmers and discuss related design and decision. This design has been implemented as a prototype which we named "Water management system (WMS) by global service mobile (GSM) using nanostructured MgO as display" for agriculture purposes.

Keywords: MgO Nanoparticles, Global Service Mobile (GSM), Water Management Systems (WMS), Agriculture, Relays.

1. INTRODUCTION

A GSM technology for water management system is proposed. As a first step towards a solution we take user's prospective for water saving and time management which can be deployed on the basic mobile handset device. Subsequently we suggest general system architecture for this mobile based horticulture system application for a farmer and discuss related design decision which help farmers to determine how much water their plant to use and how long they need to run their pump or drip their system for each day using the GSM based technology and mobile phone based delivery services. The objective of this prototype is to develop a device that allows the user to remotely control and monitor multiple water level management for different gardens using a cellular GSM phone. This system will be a powerful and flexible tool that will offer this service at any time, by any body and anywhere without the constraints of the technologies being applied. Wireless device has been gaining popularity in recent year. Cellular phone and other wireless device have driven demand for new wireless technology. In this regard, nanostructured magnesium oxide has been used as an efficient optical material to use as display for various reasons as metal oxides play a

very important role in many areas of electronics, physics, chemistry, and materials science, for different applications (Gangwar *et al.* 2016). These can adopt a large number of structural geometries with a proper electronic structure that can exhibit metallic, semiconductor or insulator character. The optical properties of magnesium oxide (MgO) widely study both experimentally and theoretically due to presence of defects (Jain *et al.* 2016) at the surface sites and their large band gap, thus it gain significant attention among various research group in this area and become a huge research topic (Peter *et al.* 2015).

The objective of this project is to develop a device that allows the user to remotely control and monitor multiple water level management for different garden using a cellular GSM phone. Fig. 1 shows the basic block diagram of our purposed prototype. This prototype is about the technique of wireless sensor, which is used to make irrigation system better for a water management by SMS approach and helps irrigators to determine how much water their crop has used (Xia *et al.* 2008) and how long they need to run their pump or drip system for each day using the latest in remote sensing wireless techniques and mobile phone based delivery services.

*A. K. Srivastava
email: aks@nplindia.org

Pan Team describes the importance of WSN in his research paper (Pan *et al.* 2010) and discuss the tremendous applications in data acquisition of the wireless sensor networks. Wireless device has been gaining popularity in recent year. Cellular phone and other wireless device have driven demand for new wireless technology. While traditional wired solutions provide a sense of reliability, convenience has become a large part of consumer's needs. The information below is factual, and provides a non-biased evaluation of current wired and wireless technology in water management system application. The purpose of this study is to review contemporary wireless network protocols and areas that affect the ability of wireless fidelity (Wi-Fi) technology to secure data transmitted over wireless networks (Fang *et al.* 2009). The research approach takes the form of a case study; in collating the methods used by existing protocols in the implementation of wireless security. So far, researchers

have acknowledged that location privacy is critical to the security of data transmitted by wireless technology.

2. SYNTHESIS OF MgO NANOSTRUCTURE

MgO nanostructures was obtained via hydrothermal method initially magnesium chloride (MgCl_2) (5.3 g, Sigma Chemical Co.) is added in 50 ml deionized water. Now add 2.03g of sodium hydroxide to 10 ml deionized water. Then add wisely NaOH dropwise to the solution at 50 °C for 2h to get white precipitates. The obtained white precipitate was put into autoclave at 250°C temperature for 10 h to get $\text{Mg}(\text{OH})_2$. Subsequently as-synthesized $\text{Mg}(\text{OH})_2$ is calcined at 500°C for obtaining MgO nanostructures and these nanostructures are used for display. Fig.2 shows as an illustrative example of electron microscopy image of MgO nanoparticles which has been used as a display.

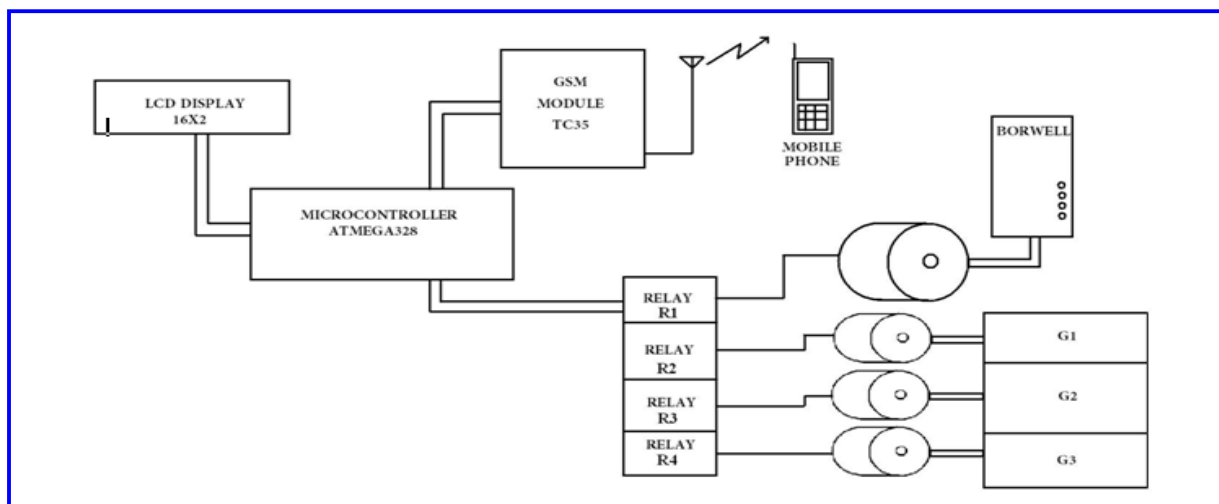


Fig. 1: Basic block diagram of water management system using nanostructured magnesium oxide

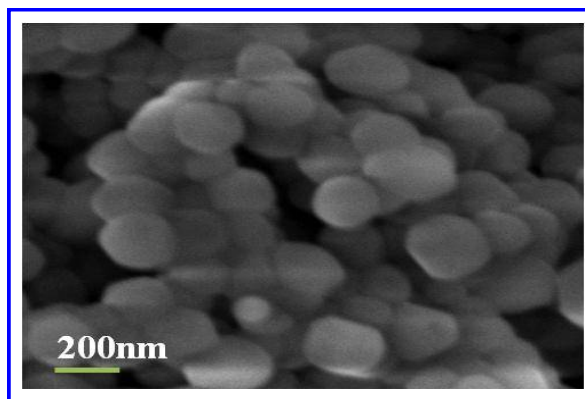


Fig. 2: Electron microscopy image of magnesium oxide nanoparticles

3. COATING OF MgO (FILM PREPARATION)

The obtained MgO nanostructures then added drop wise to the glass substrate for building a film by using single dip coater (Apex Instrument Company) and for getting uniformity of film we use spin coating unit SCU-2007 (Apex Instrument Company) with some vacuum pressure. Finally a film with green color coating is prepared as a display unit for the execution of our prototype as shown in fig. 3.

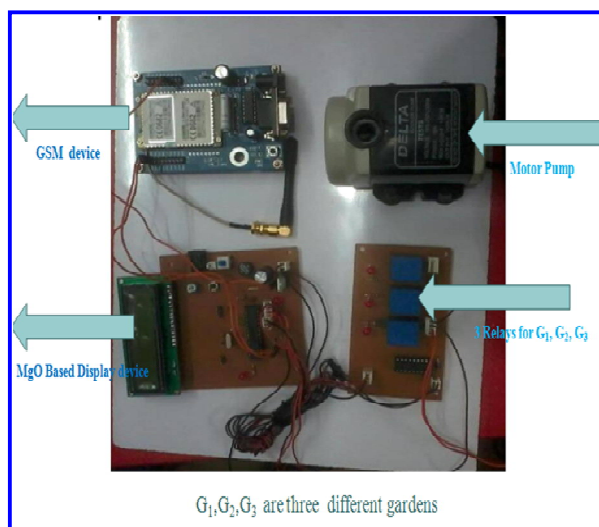


Fig. 3: Prototype of the water management system, using nanostructured magnesium oxide

Fig. 3. Shows the purposed prototype of our system. This system can help water resources manager to appreciate the potential of remote sensing capabilities for application. The available surface and ground water resources are inadequate to meet the entire water requirement for the all purpose because the demand for water has increased in recent years it needs the assessment of quantity and quality of water for its optional utilization .

The survey will be beneficial in development of a new and comprehensive irrigation control system with many advantages for resource management (Liu *et al.* 2007). Existing irrigation control technologies having many deficiencies have been compared and referenced. Many models have been compared with our proposed model that is cost effective and contains many other characteristics. A Wireless Sensor and Actuator Network (WSAN) is a group of sensors and actuators linked by wireless medium to perform distributed sensing and actuating tasks. Wireless sensor network technology (WSN) is an efficient method which

provides dynamic, real time observation for distributed data collection and monitoring (Li *et al.* 2010).

Ali *et al.* (2010) discusses cost effective irrigation control using WSN framework for monitoring of environment in greenhouses. He proposed how to design, deploy and test a framework for wireless sensor network using WSN for monitoring environment in agriculture. Its main advantage is proposing an inexpensive solution for wirelessly monitoring the agricultural fields and to increase the yield of crops. He has also presented a comparison of the available motes in the market. There are many challenges in the domain of agriculture like climate change, water shortage, labour shortage, societal concerns etc. Cattle farming that also very much dependent on agriculture domain, has some other issues like animal welfare, food safety and environmental effects etc.

Liu *et al.* (2007) created a remote measurement and control system for Green House based on GSM-SMS and the pastures evaluation. Their work includes the development of solar-powered special sensors, sensor networks for pastures Soil moisture assessment and photographic analysis of grass growth, and the sensor network for animal behaviour (sleeping, grazing, ruminating etc.) analysis and control. Arrouf *et al.* (2011) Photovoltaic pumping system based on Intel controller.

4. RESULT & DISCUSSION

This prototype is to develop a device that allows the user to remotely control and monitor multiple water level management for different gardens using a cellular GSM phone as shown in Table 1. This system will be a powerful and flexible tool. Moreover the same prototype is also tested for money plant (placed in 250 ml of water jar as shown in fig.4) for checking the water level requirement on daily basis as indicated in Table 2 that will offer this service at any time, by any body and anywhere without the constraints of the technologies being applied. The circuit is also tested for switching ON and OFF for the filling the water tank. The circuit is working fine and found that the motor is automatically ON and OFF based on the level of the water level as shown in table 1. Moreover, table 2 indicates the water requirement by a money plant on daily basis. Form the above observations as indicated in Table 2 the amount of water required by the money plant placed in a water jar is approximately equal to 0.002058 ml/per day (the same digit is also display by the prototype). However the same prototype is also fully tested and demonstrated at Water Technology Center (WTC) in Indian Agriculture and Research Institute (IARI) Pusa, New

Delhi during the training programme held from 19th to 24th December, 2016. Moreover, on dated 24th December, 2016 the prototype is interfaced with embedded circuit board containing inbuilt global service mobile (GSM module) placed inside a cultivated land (Field) having three different varieties of crops for testing the module as a display and determination of water level at each crop. Fig.4 shown below indicates the implementation and real time testing of the prototype.



Fig. 4: Testing of prototype and water requirement by a money plant placed in 250 ml of water jar

Table .1 Indicate the testing of prototype and water requirement in three different gardens

Test Case	Description	Expected Result	Actual Result
1	Automatic Water Supply ON for Garden 1	Water Flow Through Pipe 1 only	Yes
2	Automatic Water Supply ON for Garden 2	Water Flow Through Pipe 2 only	Yes
3	Automatic Water Supply ON for Garden 3	Water Flow Through Pipe 3 only	Yes
4	Automatic Water Supply ON for Garden 1 and 2	Water Flow Through Pipe 1 & 2 only	Yes
5	Automatic Water Supply ON for Garden 1 and 3	Water Flow Through Pipe 1 & 3 only	Yes
6	Automatic Water Supply ON for Garden 2 and 3	Water Flow Through Pipe 2&3 only	Yes
7	Automatic Water Supply ON for Garden 1,2 and 3	Water Flow Through all Pipes	Yes

Table 2. Indicate the testing of prototype and water requirement by a money plant

No. of Days	Plant used for testing by the Prototype	Amount of water requirement (ml)
Day 1	Money Plant	0.00205 ml
Day 2	Money Plant	0.00207 ml
Day 3	Money Plant	0.00205 ml
Day 4	Money Plant	0.00204 ml
Day 5	Money Plant	0.00206 ml
Day 6	Money Plant	0.00205 ml
Day 7	Money Plant	0.00205 ml
Day 8	Money Plant	0.00206 ml
Day 9	Money Plant	0.00207 ml
Day 10	Money Plant	0.00208 ml



Fig. 5: Testing of prototype and water requirement by different crops in a cultivated land (a) Pulse (b) Maize and (c) wheat.

4. CONCLUSION

The idea behind this prototype is to use the existing wireless sensor infrastructure and all the operations involving the GSM system. Further we send short message service (SMS), it goes through the GSM system which can be used as a simple SIM card and GSM module. To operate GSM modem, we have to use the AT commands to operate them for example, if any SMS arrives the GSM modem sends the serial data in ASCII format then we read this data and if we connect the modem with the serial port of the microcontroller (89CS51) at the baud rate of data flow is 9600(BR) which can turn on/off any pump by sending a proper message hence we can always control the water level of different gardens, water level in a money plant and water requirement in a cultivated land (agriculture purposes). Table 1, shows the automatic supply of water from 3 different gardens G₁, G₂, and G₃. As the microcontroller comes to know that a SMS has been arrived, it can send a proper AT command to read the SMS. The reading of message returns the mobile no of sender, the time and much more information. We have to select the SMS part of the message. The starting string of the SMS is used as the password. As the password is matched, then the same message is arrived is assumed to be valid by the microcontroller otherwise, it ignores the same message. Here the starting character is the '#' and terminating character is '*'. To control the water supply, here we have user three water pumps. Additionally we can read the water level also by sending a proper message to the system. Table 2 indicates the water requirement by a money plant on daily basis. Hence in general the possible target includes water system, security systems, solid state electronic devices, management system in agriculture/horticulture purposes, and climate control anything with an electrical interface.

ACKNOWLEDGEMENTS

We thank the Director, NPL New Delhi, India for providing the necessary experimental facilities. Dr.B.K.Gupta and Dr.Ritu Srivastava are gratefully acknowledged for providing the necessary motivation and instrumentation facilities for film preparation and coating material. The Projects NanoSHE (BSC: 0112) and DST (GAP: 113932) are gratefully acknowledged.

REFERENCES

Ali, G., Shaikh, A. W., Rehman, A. U. and Shaikh, Z. A., A frame work for development of cost effective irrigation control system based on zigbee for efficient water management, ICMEE, (2010).
doi: 10.1109/ICMEE.2010.5558404

Arrouf, M., Nenabid, F. and Mebarkia, H., Photovoltaic pumping system based on Intel 80C196KC microcontroller, *IEEE 10th International Conference on Environment and Electrical Engineering*, 01-05(2011).
doi:10.1109/EEEIC.2011.5874652

Banerjee, G. K. and Rahul Singhal, Microcontroller based polyhouse automation controller, *International Symposium on Electronic system Design*, 158-162(2010).
doi:10.1109/ISED.2010.38

Devaraja, P. B., Avadhani, D. N., Nagabhushana, H., Prashantha, S. C., Sharma, S. C., Nagabhushana, B. M., Nagaswarupa, H. P. and Daruka Prasad, B., Luminescence properties of MgO: Fe³⁺ nanopowders for WLEDs under NUV excitation prepared via propellant combustion route, *J. Radi. Rese. Appl. Sci.*, 8(3), 362-373(2015).
doi:10.1016/j.jrras.2015.02.001

Fang, G., Gao, Y. and Zhenma, Z., Study and construction on evaluation index system of modernization of water conservancy project management, *IEEE Conference*, (2009).

Gangwar, J., Gupta, B. K. and Srivastava, A. K., Prospects of emerging engineered oxide nanomaterials and their applications, *Def. Sci. J.*, 66(4), 323-340(2016).
doi:10.14429/dsj.66.10206

Gangwar, J., Gupta, B. K., Kumar, P., Tripathi, S. K. and Srivastava, A. K., Time-resolved and photoluminescence spectroscopy of θ -Al₂O₃ nanowires for promising fast optical sensor applications, *Dalton Trans.*, 43(45), 17034-17043(2014).
doi: 10.1039/c4dt01831a

Handa, T., Oda, A., Tachikawa, T., Ichimura, J., Watanabe, Y. and Nishi. H., Knives: A distributed demand side management system, *6th International Conference on Industrial Informatics*, (ICONN) Korea, 324-329(2008).
doi:10.1109/INDIN.2008.4618117

Jain, N., Marwaha, N., Verma, R., Gupta, B. K. and Srivastava, A. K., Facile synthesis of defect-induced highly-luminescent MgO nanostructures for promising solid-state lighting applications, *RSC Adv.*, 6, 4960-4968(2016).
doi:10.1039/C5RA21150F

Pan, A., Zhang, J. G., Nie, Z., Cao, G., Arey, B. W., Li, G., Liang, S. Q. and Jun Liu, Facile synthesized nanorod structured vanadium pentoxide for high-rate lithium batteries, *J. Mater. Chem.*, 20, 9193-9199(2010).
doi:10.1039/C0JM01306D

Peter, P. V., Changhyuk, K., Sukbyung, C., Seungha, S., Sekwon, J., Mamoru, K., Kimura, S. I., Fukui,

- K. and Mansoo Choi, Two-band luminescence from an intrinsic defect in spherical and terraced MgO Nanoparticles, *Appl. Physic. Lett.* 106, 183106-183109(2015).
doi:10.1063/1.4918804
- Shen Jin, Song Jingling, Han Qiuyan, Wang Shengde and Yang Yan, A Remote Measurement and control system for Green House Based on GSM-SMS, *IEEE International Conference on EMI*, (2007).
doi:10.1109/ICEML.2007.4350806
- Xin, B., Ren, Z., Wang, P., Liu, J., Jing, L. and Fu, H., Study on the mechanisms of photoinduced carrier's separation and recombination for Fe^{3+} - TiO_2 photocatalysts, *App. Surf. Sci.*, 253(9), 4390–4395(2007).
doi:10.1016/j.apsusc.2006.09.049
- Xia, Ti., Kovoichich, M., Liong, M., Madler, L., Gilbert, B., Shi, H., Yeh, J. I., Zink, J. I. and Nel, A. E., Comparison of the Mechanism of Toxicity of Zinc Oxide and Cerium Oxide Nanoparticles Based on Dissolution and Oxidative Stress Properties, *ACS Nano*, 2 (10), 2121–2134(2008).
doi:10.1021/nn800511k
- Zifu, Li., Geiger, W. F. Jin, X., New concept for water Management in urban area of China, *IEEE Conference*, (2009).
doi:10.1109/ICMSS.2009.5303380